


PRODUCT DESCRIPTION:

Designed to fit any ceiling surface. Suspended and hanging for other types of ceilings such as art galleries, homes, schools, offices, hotels, restaurants, retail stores and other commercial or industrial applications.

FEATURES:

- Low maintenance
- Environmentally friendly
- No mercury
- Recyclable

DIMENSIONS:

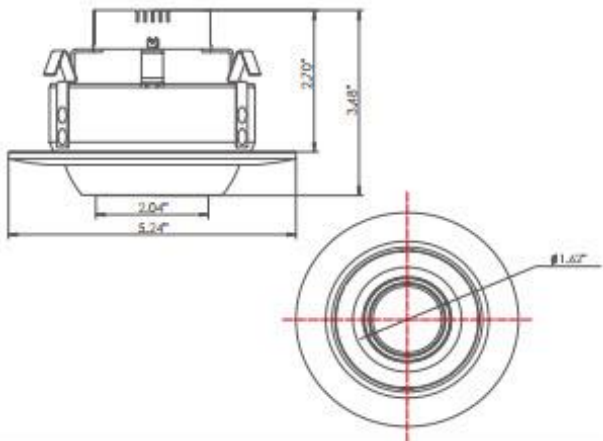

4" Gimbal Downlight 10W Spec

LOD-DL4GB-AD10WD-27K

LOD-DL4GB-AD10WD-50K



SPECIFICATIONS:

SPECIFICATION	Details	
Model	LOD-DL4GB-AD10WD-27K	LOD-DL4GB-AD10WD-50K
Input Wattage (W)	10W	10W
Lumens Delivered (LM)	697LM	739.5LM
Efficacy (LM/W)	69.82LM/W	74.55LM/W
CRI	91.3	91.5
Lifespan	35,000 hours	35,000 hours
Color Temperature	2,700K	5,000K
Wattage Equivalent	65W	65W
Dimmable	Yes	Yes
IP Rating	Damp Location	Damp Location
Beam Angle	95	95
Input Voltage	120V	120V
Power Factor	0.95	0.95
Housing	Aluminum	Aluminum
Lens	Frosted	Frosted
Mounting	E26	E26
Size	5.24" x 3.48" x 1.62"	5.24" x 3.48" x 1.62"
Certification	ES, UL, FCC, CE RoHS, TUV, ISO9001	ES, UL, FCC, CE RoHS, TUV, ISO9001
Operating Temperature	-20°C to 50°C (-4°F to 122°F)	-20°C to 50°C (-4°F to 122°F)
Environment	Indoor	Indoor
Warranty	3 years limited	3 years limited

